

A novel CuS/graphene-coated separator for suppressing the shuttle effect of Lithium/sulfur batteries

Yongguang Zhang¹, Liancheng Sun¹, Yan Zhao¹

¹ School of Materials Science and Engineering, Research Institute for Energy Equipment Materials, Hebei University of Technology

E-mail: yongguangzhang@hebut.edu.cn

We demonstrate a facile synthesis process to fabricate and deposit flower-like CuS/graphene nanocomposite on a multi-functional separator for efficient immobilization of polysulfides of lithium/sulfur (Li/S) batteries. Admirably, as-prepared CuS/graphene composite endows enriched oxygen-functional groups and excellent electrical conductivity for cathode area. The introduction of CuS/graphene-coated separator effectively reduced the dissolution of lithium polysulfides as well as enhanced the integrity of the sulfur cathode for Li/S batteries. The cell with this modified separator delivered an enviable discharge capacity of 1302 mAh g⁻¹ at 0.2 C, as well as an excellent reversible capacity of 760 mAh g⁻¹ after 100 cycles. Furthermore, an outstanding rate capability of 568 mAh g⁻¹ at 3.0 C has been achieved in the cell with CuS/graphene-coated separator. The results reveal that CuS/graphene-coated separator shows an admirable potentiality to boost the performance of next-generation Li/S batteries.

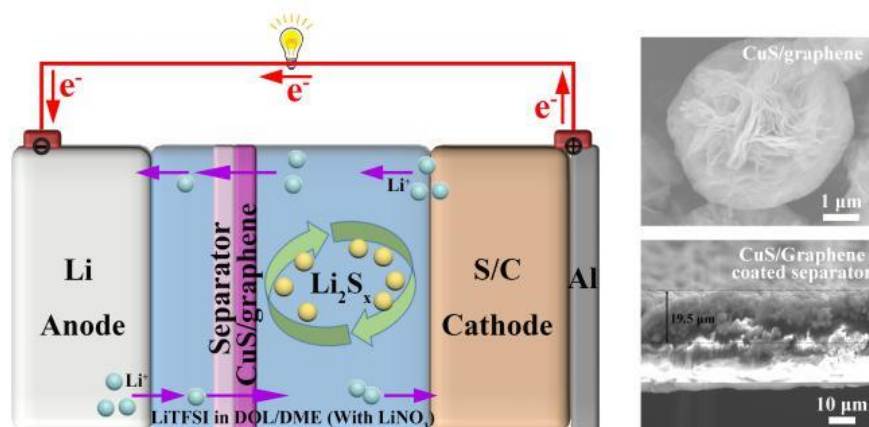


Fig.14

